

偏芯異径ソケット


SCS13A(SUS304)




お客様のご希望に
お応えしました。

偏芯異径ソケット

■仕様材質：SCS13A(SUS304)
ねじ規格：JIS B 0203



サイズ及び材質表示

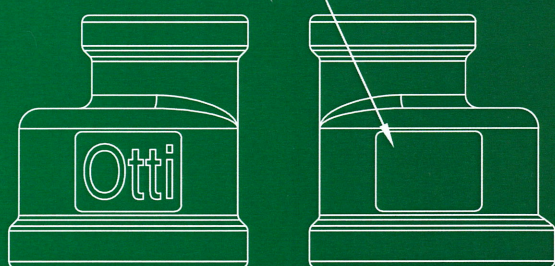

外観図

呼び径		ΦA	ΦB	ΦC	ΦD	L	P
15A×8A	1/2×1/4B	30.0	27.0	21.0	18.0	34.0	4.5
15A×10A	1/2×3/8B	30.0	27.0	25.0	22.0	34.0	2.5
20A×10A	3/4×3/8B	36.0	33.0	25.0	22.0	38.0	5.5
20A×15A	3/4×1/2B	36.0	33.0	30.0	27.0	38.0	3.0
25A×10A	1×3/8B	44.0	41.0	25.0	23.0	42.0	9.0
25A×15A	1×1/2B	44.0	41.0	32.0	29.0	42.0	6.0
25A×20A	1×3/4B	44.0	41.0	38.0	35.0	42.0	3.0
32A×15A	1 1/4×1/2B	53.0	50.0	33.0	30.0	48.0	10.0
32A×20A	1 1/4×3/4B	53.0	50.0	38.0	35.0	48.0	7.5
32A×25A	1 1/4×1B	53.0	50.0	44.0	41.0	48.0	4.5
40A×20A	1 1/2×3/4B	60.0	56.0	39.0	36.0	52.0	10.0
40A×25A	1 1/2×1B	60.0	56.0	45.0	42.0	52.0	7.0
40A×32A	1 1/2×1 1/4B	60.0	56.0	53.0	50.0	52.0	3.0
50A×25A	2×1B	73.0	69.0	46.0	43.0	58.0	13.0
50A×32A	2×1 1/4B	73.0	69.0	54.0	51.0	58.0	9.0
50A×40A	2×1 1/2B	73.0	69.0	61.0	57.0	58.0	6.0